

Silicon Carbide Schottky Barrier Diode

V_{RRM}	1200 V	I_F	20 A
$V_{F(Typ.)}$	1.4 V	Q_C	103 nC

Features

- Positive Temperature Coefficient on V_F
- Low Conduction Loss
- Zero Reverse Recovery
- High junction temperature 175 °C
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard


Mechanical Data

- Case: TO-247AD-2LD molded plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 6.056 grams

Application

- PFC, UPS, PV Inverter

TO-247AD-2LD

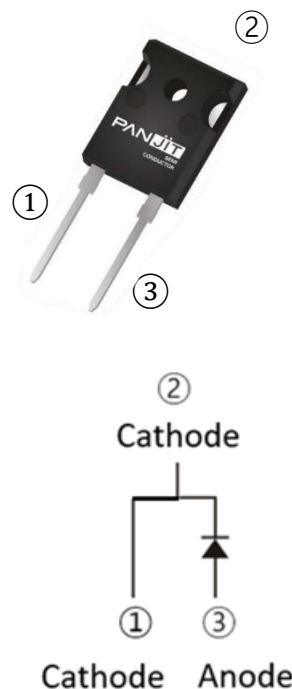

Maximum Ratings and Thermal Characteristics ($T_C = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

PARAMETER		SYMBOL	LIMIT	UNIT
Repetitive Peak Reverse Voltage		V_{RRM}	1200	V
DC Blocking Voltage		V_{DC}	1200	V
Continuous Forward Current	$T_C = 158\text{ }^{\circ}\text{C}$	I_F	20	A
Repetitive Peak Surge Current <i>Half Sine Wave, $D=0.1$</i>	$T_C = 25\text{ }^{\circ}\text{C}$, $t_p = 10\text{ms}$	I_{FRM}	112	A
	$T_C = 125\text{ }^{\circ}\text{C}$, $t_p = 10\text{ms}$		88	
Peak Forward Surge Current <i>Half Sine Wave</i>	$T_C = 25\text{ }^{\circ}\text{C}$, $t_p = 10\text{ms}$	I_{FSM}	232	A
	$T_C = 125\text{ }^{\circ}\text{C}$, $t_p = 10\text{ms}$		208	
Peak Forward Surge Current	$t_p = 10\mu\text{s}$, Pulse		1200	A
i^2t value	$T_C = 25\text{ }^{\circ}\text{C}$, $t_p = 10\text{ms}$	$\int i^2 dt$	269	A^2s
	$T_C = 125\text{ }^{\circ}\text{C}$, $t_p = 10\text{ms}$		216	
Maximum Power Dissipation		P_{total}	268	W
Operating Junction Temperature Range		T_J	-55~175	$^{\circ}\text{C}$
Storage Temperature Range		T_{STG}	-55~175	$^{\circ}\text{C}$

Electrical Characteristics ($T_C = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Forward Voltage Drop	V_F	$I_F = 20\text{ A}, T_J = 25\text{ }^{\circ}\text{C}$	-	1.4	1.6	V
		$I_F = 20\text{ A}, T_J = 125\text{ }^{\circ}\text{C}$	-	1.7	-	
		$I_F = 20\text{ A}, T_J = 175\text{ }^{\circ}\text{C}$	-	1.9	-	
Reverse Leakage Current	I_R	$V_R = 1200\text{ V}, T_J = 25\text{ }^{\circ}\text{C}$	-	0.8	50	μA
		$V_R = 1200\text{ V}, T_J = 175\text{ }^{\circ}\text{C}$	-	4.4	-	μA
Total Capacitive Charge	Q_C	$I_F = 10\text{ A}, V_R = 800\text{ V}$	-	103	-	nC
Total Capacitance	C	$V_R = 1\text{ V}, f = 1\text{ MHz}$	-	1157	-	pF
		$V_R = 400\text{ V}, f = 1\text{ MHz}$	-	99	-	pF
		$V_R = 800\text{ V}, f = 1\text{ MHz}$	-	84.5	-	pF
Capacitance Stored Energy	E_C	$V_R = 800\text{ V}$	-	32.5	-	μJ
Thermal Resistance	$R_{\theta JC}$		-	0.43	0.56	$^{\circ}\text{C/W}$

TYPICAL CHARACTERISTIC CURVES

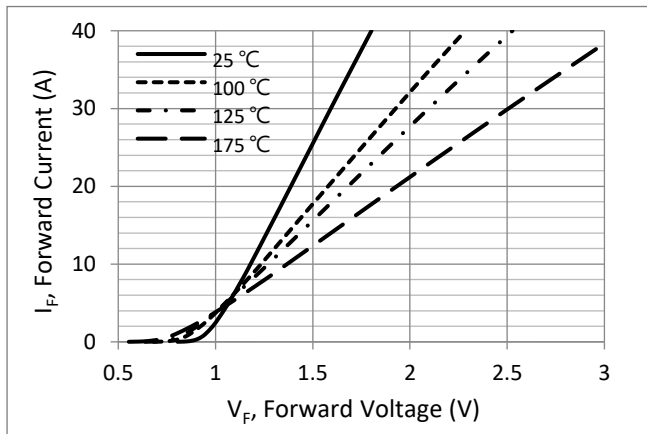


Fig.1 Forward Characteristics

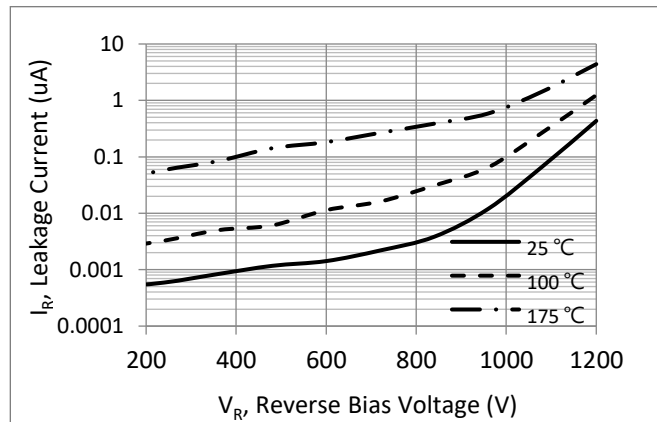


Fig.2 Reverse Characteristics

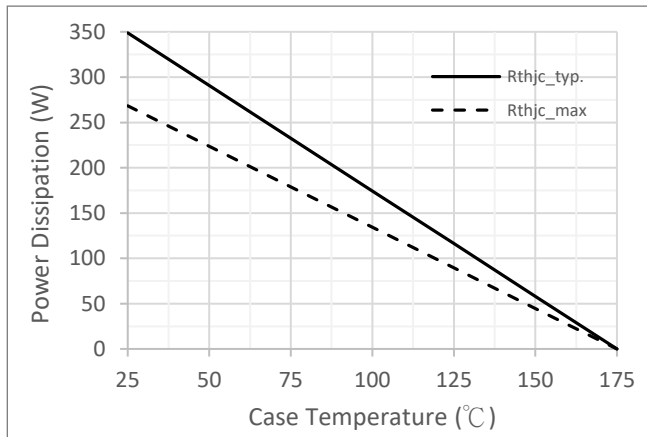


Fig.3 Power Derating Curve

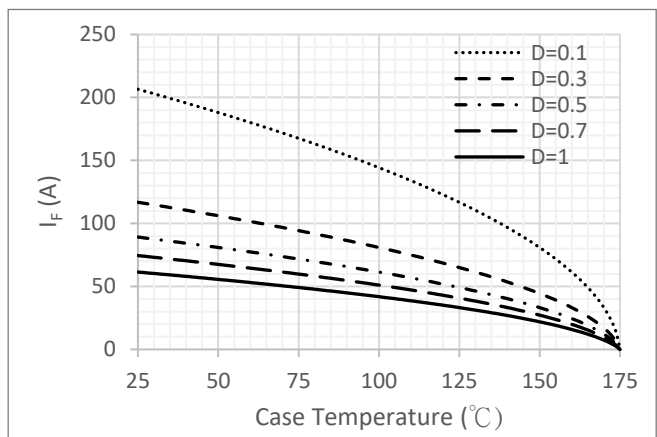


Fig.4 Current Derating Curve

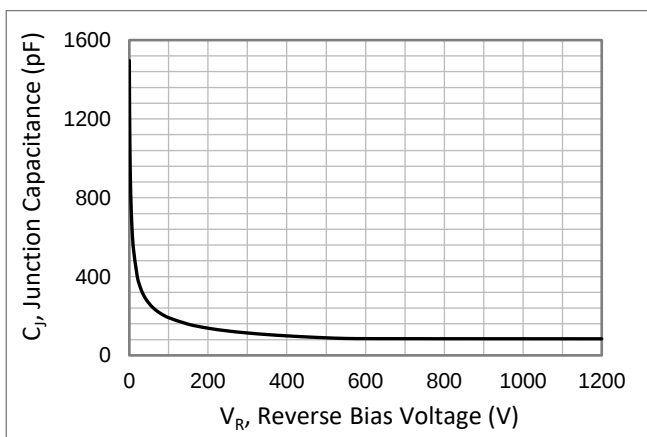


Fig.5 Typical Junction Capacitance

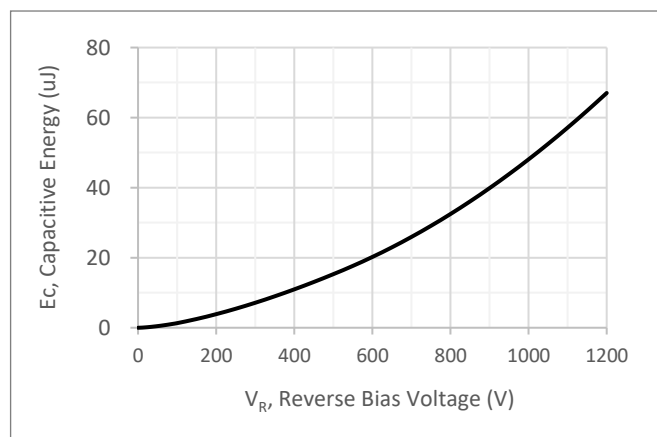


Fig.6 Capacitance Stored Energy

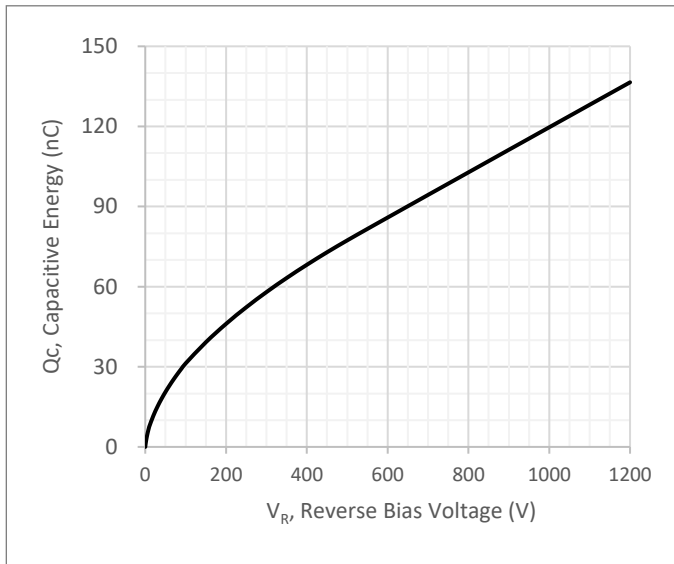


Fig.7 Total capacitive charges VS. Reverse voltage applied (typical values)


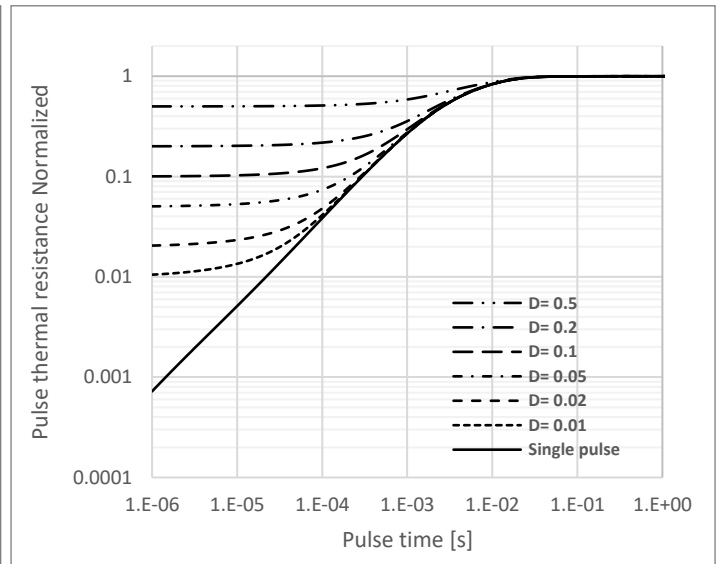


Fig.8 Max. Transient thermal impedance

Product and Packing Information

Part No.	Package Type	Packing Type	Marking
PCDH20120G3	TO-247AD-2LD	30pcs / Tube	CDH20120G3

Packaging Information

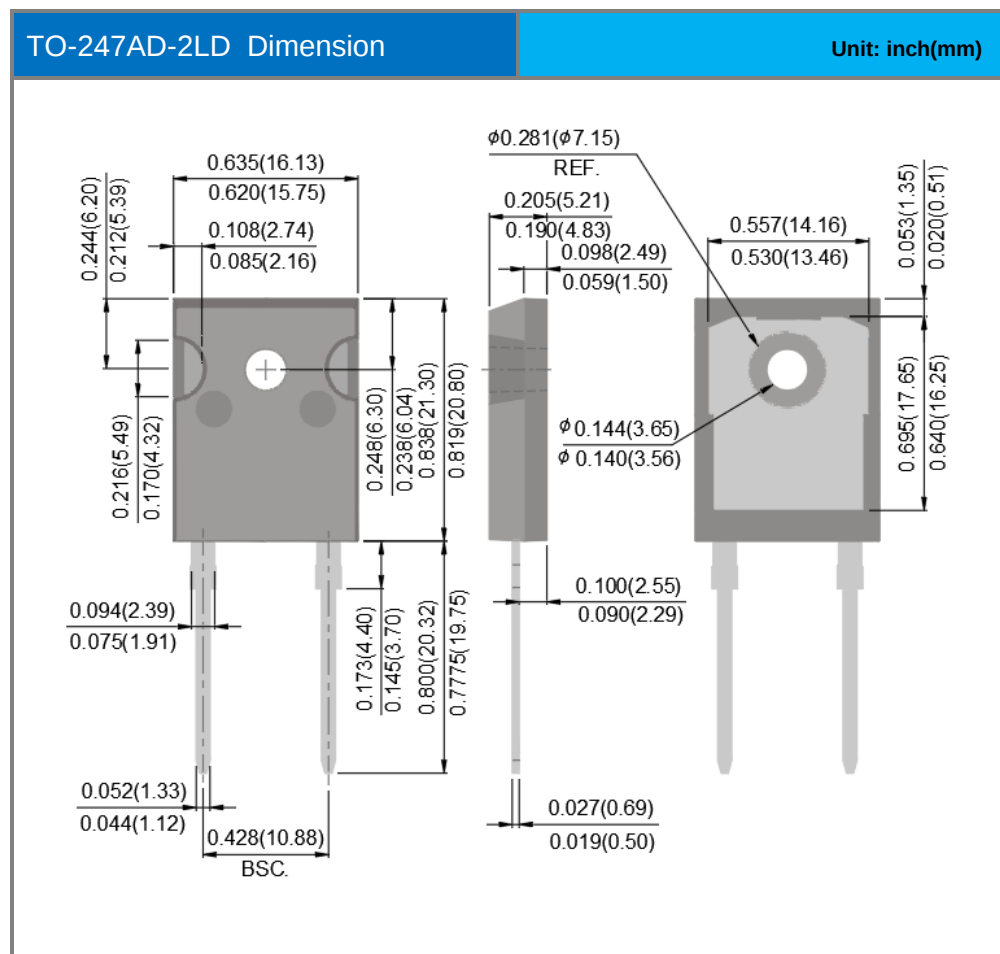

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from PANJIT International Inc..
- PANJIT International Inc. reserves the rights to make changes of the content herein the document follow PCN procedure. Please refer to our website for the latest document.
- PANJIT International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- PANJIT International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. PANJIT International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed or authorized for equipment relating to human life, life-saving or life-sustaining applications, such as medical instruments, transportation equipment, aerospace machinery, or for other applications intended to cause personal injury. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify PANJIT International Inc. for any damages resulting from such improper use or sale. For additional terms and conditions regarding the use of PANJIT products, please refer to the Terms of Use available on the PANJIT website.
- Since PANJIT uses lot number as the tracking base, please provide the lot number for tracking when complaining.