

1K5HPC8.5CA-AU ~ 1K5HPC85CA-AU Series

Transient Voltage Suppressor

Voltage

8.5~85 V

Power

1500 W


Features

- ISO10605(C=330pF, R=330Ω): ±30kV Air, ±30kV Contact
- ISO7637-2(Note 1):
 - Pulse 1: VS = -150V
 - Pulse 2a: VS = +112V
 - Pulse 3a: VS = -220V
 - Pulse 3b: VS = +150V
- High temperature soldering : 260°C/10 seconds at terminals
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case : TO-277C
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.11 grams

TO-277C



Maximum Ratings and Thermal Characteristics (T_A = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNIT
Peak Pulse Power Dissipation(tp = 10 / 1000 us) ^(Note 2,4)	P _{PP}	1500	W
Peak Pulse Power Dissipation(tp = 8 / 20 us) ^(Note 3,4)	P _{PP}	10000	W
Peak Pulse Current on tp = 10 / 1000 us waveform ^{(Fig.2) (Note 2)}	I _{PPM}	See table 1	A
ESD IEC61000-4-2(Air)	V _{ESD}	±30	KV
ESD IEC61000-4-2(Contact)		±30	
Typical Thermal Resistance Junction to Ambient ^(Note 4)	R _{θJA}	65	°C/W
Operating Junction Temperature Range	T _J	-55~175	°C
Storage Temperature Range	T _{STG}	-55~175	°C

Note :

1. Not applicable to parts with V_{RWM} lower than battery voltage.
2. Non-repetitive current pulse, per Fig.3 and derated above T_A=25°C per Fig.2.
3. Non-repetitive current pulse, per Fig.4 and derated above T_A=25°C per Fig.2.
4. Mounted on 100cm² copper pads to each terminal.
5. Mounted on a FR4 PCB, single-sided copper, standard footprint.







1K5HPC8.5CA-AU ~ 1K5HPC85CA-AU Series

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Part Number	V_{RWM}	V_{BR}			Reverse Leakage	$V_C@I_{PP}$ (Note 1)		Typical Temp. Coefficient of VBR	Marking Code
		Min.	Max.	IT	$I_R@V_{RWM}$				
		V	V	mA	μA	V	A	$\%/^\circ\text{C}$	
1K5HPC8.5CA-AU	8.5	9.44	10.4	1	50	14.4	104.2	0.057	5HPC8V5CA
1K5HPC9.0CA-AU	9	10	11.1	1	20	15.4	97.4	0.058	5HPC9V0CA
1K5HPC10CA-AU	10	11	12.3	1	5	17	88.2	0.06	5HPC10CA
1K5HPC11CA-AU	11	12.2	13.5	1	1	18.2	82.4	0.061	5HPC11CA
1K5HPC12CA-AU	12	13.3	14.7	1	1	19.9	75.3	0.062	5HPC12CA
1K5HPC13CA-AU	13	14.4	15.9	1	1	21.5	69.7	0.063	5HPC13CA
1K5HPC14CA-AU	14	15.6	17.2	1	1	23.2	64.7	0.065	5HPC14CA
1K5HPC15CA-AU	15	16.7	18.5	1	1	24.4	61.5	0.066	5HPC15CA
1K5HPC16CA-AU	16	17.8	19.7	1	1	26	57.7	0.067	5HPC16CA
1K5HPC17CA-AU	17	18.9	20.9	1	1	27.6	53.3	0.068	5HPC17CA
1K5HPC18CA-AU	18	20	22.1	1	1	29.2	51.4	0.069	5HPC18CA
1K5HPC20CA-AU	20	22.2	24.5	1	1	32.4	46.3	0.069	5HPC20CA
1K5HPC22CA-AU	22	24.4	26.9	1	1	35.5	42.2	0.07	5HPC22CA
1K5HPC24CA-AU	24	26.7	29.5	1	1	38.9	38.6	0.071	5HPC24CA
1K5HPC26CA-AU	26	28.9	31.9	1	1	42.1	35.6	0.071	5HPC26CA
1K5HPC28CA-AU	28	31.1	34.4	1	1	45.4	33	0.071	5HPC28CA
1K5HPC30CA-AU	30	33.3	36.8	1	1	48.4	31	0.072	5HPC30CA
1K5HPC33CA-AU	33	36.7	40.6	1	1	53.3	28.1	0.073	5HPC33CA
1K5HPC36CA-AU	36	40	44.2	1	1	58.1	25.8	0.073	5HPC36CA
1K5HPC40CA-AU	40	44.4	49.1	1	1	64.5	23.2	0.074	5HPC40CA
1K5HPC43CA-AU	43	47.8	52.8	1	1	69.4	21.6	0.075	5HPC43CA
1K5HPC45CA-AU	45	50	55.3	1	1	72.7	20.6	0.075	5HPC45CA
1K5HPC48CA-AU	48	53.3	58.9	1	1	77.4	19.4	0.076	5HPC48CA
1K5HPC51CA-AU	51	56.7	62.7	1	1	82.4	18.2	0.076	5HPC51CA
1K5HPC54CA-AU	54	60	66.3	1	1	87.1	17.2	0.077	5HPC54CA
1K5HPC58CA-AU	58	64.4	71.2	1	1	93.6	16	0.078	5HPC58CA
1K5HPC60CA-AU	60	66.7	73.7	1	1	96.8	15.5	0.078	5HPC60CA
1K5HPC64CA-AU	64	71.1	78.6	1	1	103	14.6	0.079	5HPC64CA
1K5HPC70CA-AU	70	77.8	86	1	1	113	13.3	0.08	5HPC70CA
1K5HPC75CA-AU	75	83.3	92.1	1	1	121	12.4	0.081	5HPC75CA
1K5HPC78CA-AU	78	86.7	95.8	1	1	126	11.4	0.082	5HPC78CA
1K5HPC85CA-AU	85	94.4	104	1	1	137	10.4	0.084	5HPC85CA

1K5HPC8.5CA-AU ~ 1K5HPC85CA-AU Series

TYPICAL CHARACTERISTIC CURVES

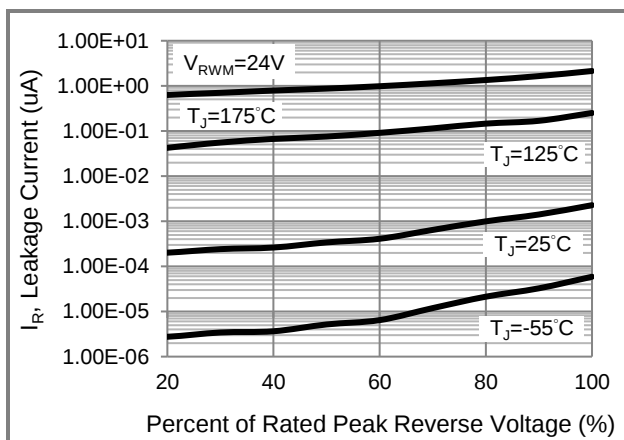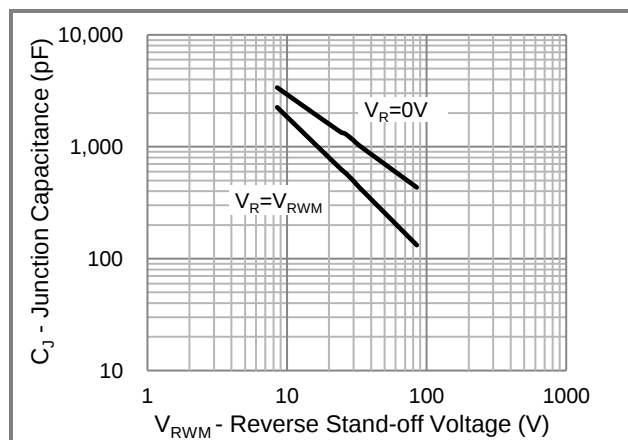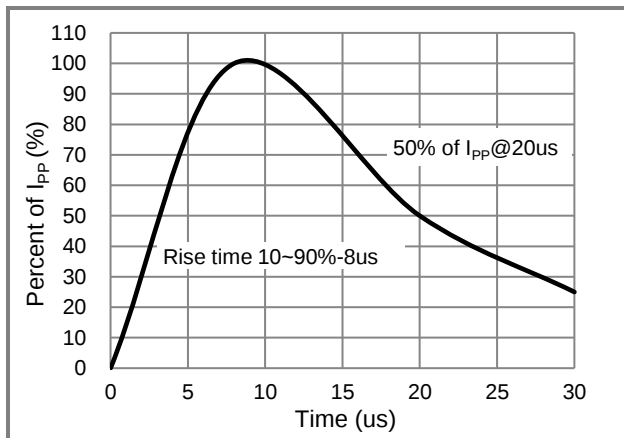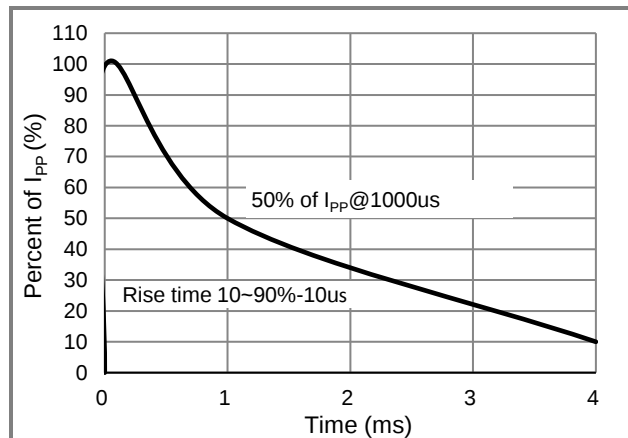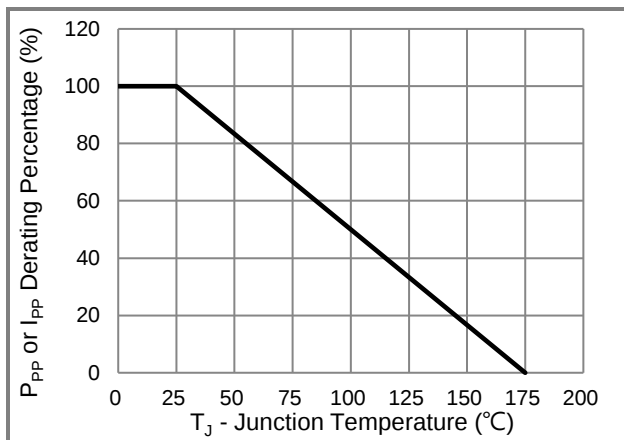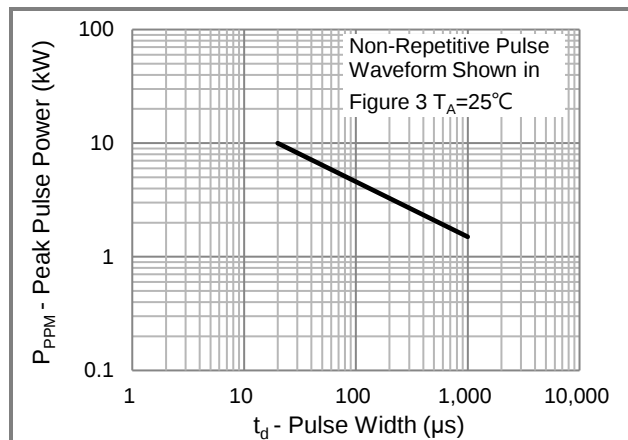

1K5HPC8.5CA-AU ~ 1K5HPC85CA-AU Series

TYPICAL CHARACTERISTIC CURVES

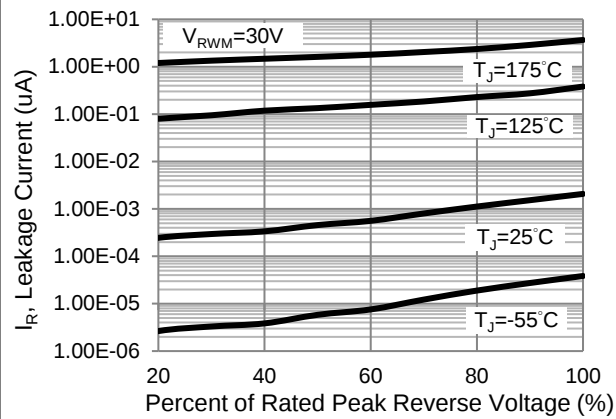




Fig.7 Typical Reverse Characteristics

1K5HPC8.5CA-AU ~ 1K5HPC85CA-AU Series

Product and Packing Information

Part No.	Package Type	Packing Type	Marking
1K5HPCxxxCA-AU	TO-277C	5K pcs / 13" reel	See Table

Packaging Information & Mounting Pad Layout

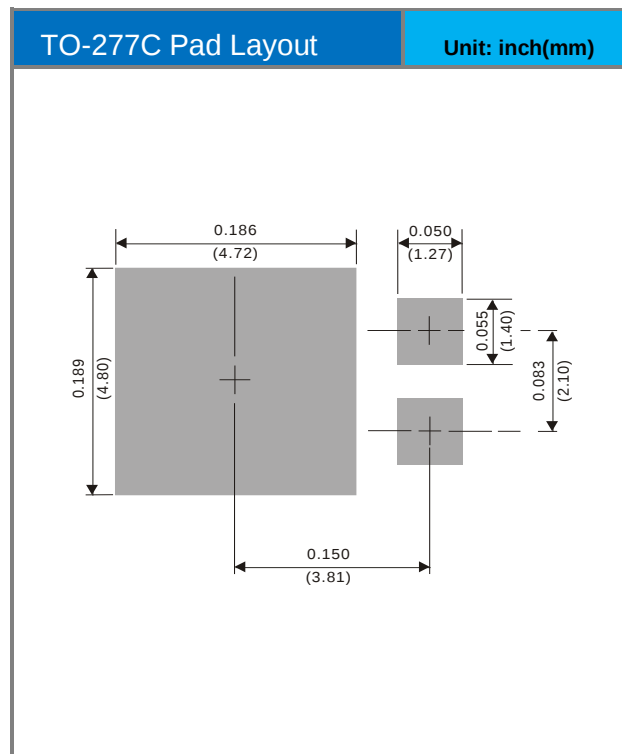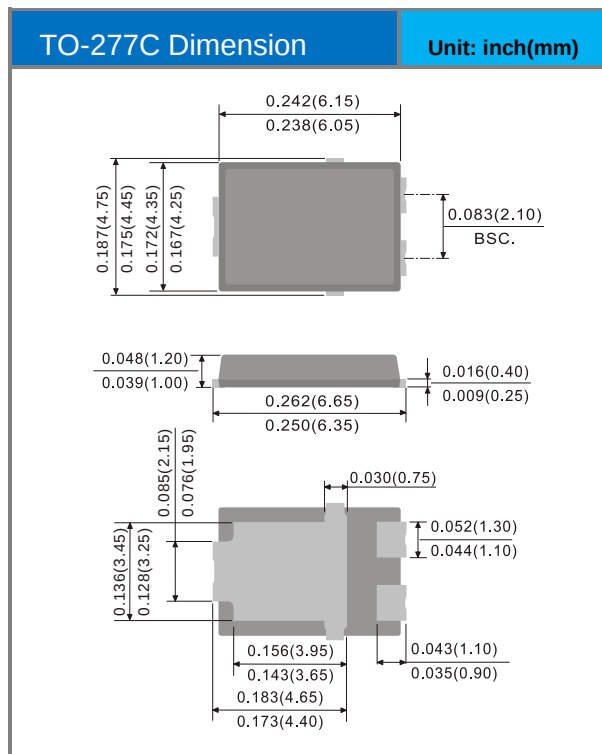

1K5HPC8.5CA-AU ~ 1K5HPC85CA-AU Series

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from PANJIT International Inc..
- PANJIT International Inc. reserves the rights to make changes of the content herein the document follow PCN procedure. Please refer to our website for the latest document.
- PANJIT International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- PANJIT International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. PANJIT International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed or authorized for equipment relating to human life, life-saving or life-sustaining applications, such as medical instruments and aerospace machinery, or for other applications intended to cause personal injury. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify PANJIT International Inc. for any damages resulting from such improper use or sale. For additional terms and conditions regarding the use of PANJIT products, please refer to the Terms of Use available on the PANJIT website.
- Since PANJIT uses lot number as the tracking base, please provide the lot number for tracking when complaining.