

Surface Mount Super Fast Recovery Rectifiers

V_{RRM}

200V

I_F

5 A



Features

- Superfast recovery times-epitaxial.
- Low forward voltage, high current capability.
- Hermetically sealed.
- Low leakage.
- High surge capability.
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case: TO-252AA molded plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.3217 grams

TO-252AA

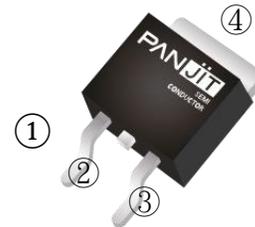

blank

Maximum Ratings and Thermal Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise specified)

PARAMETER	SYMBOL	ED502D	UNITS
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	200	V
Maximum RMS Voltage	V_{RMS}	140	V
Maximum DC Blocking Voltage	V_{DC}	200	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	5	A
Peak Forward Surge Current <i>tp = 8.3 ms, single half sine-wave</i>	I_{FSM}	75	A
Maximum Forward voltage at 5A per diode (Note 1)	V_F	0.95	V
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	$T_J=25^\circ\text{C}$ 1	μA
		$T_J=125^\circ\text{C}$ 100	
Maximum Reverse Recovery Time (Note 2)	T_{RR}	35	nS
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$	30	$^\circ\text{C/W}$
	$R_{\theta JL}$	10	
	$R_{\theta JC}$	8	
Operating Junction and Storage Temperature Range	T_{STG}	-55~150	$^\circ\text{C}$

NOTES :

1. Pulse Test with $PW=300 \mu\text{sec}$, 2% Duty Cycle.
2. Reverse Recovery Test Conditions : $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$.
3. Mounted on a FR4 PCB, single-sided copper, with 100cm^2 copper pad area.

TYPICAL CHARACTERISTIC CURVES

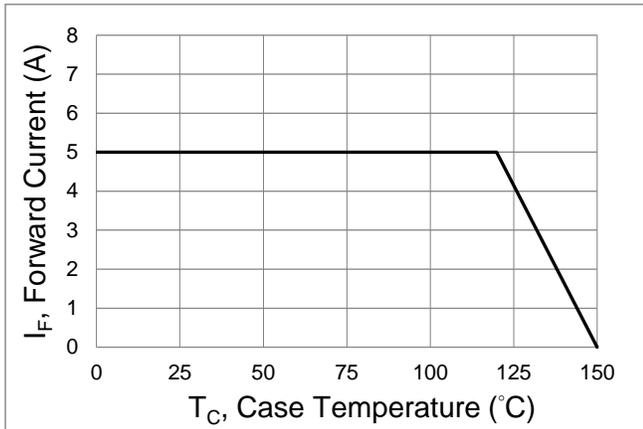


Fig.1 Forward Current Derating Curve

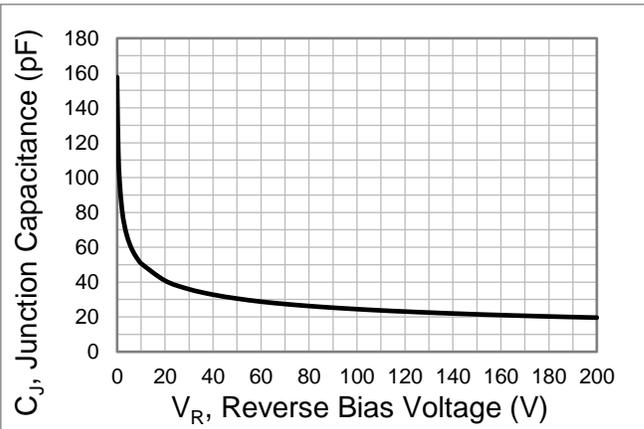


Fig.2 Typical Junction Capacitance

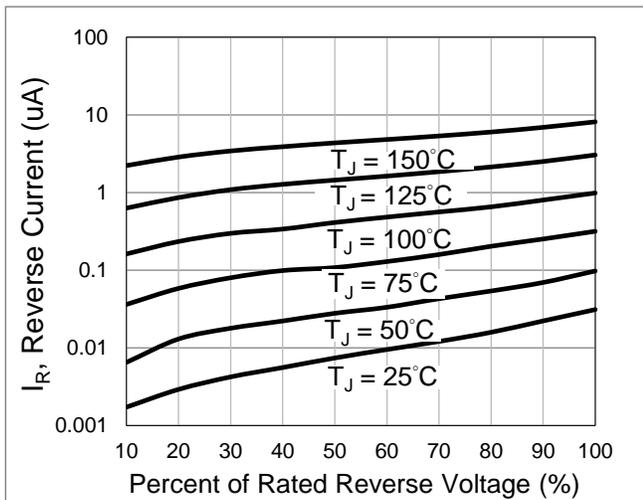


Fig.3 Typical Reverse Characteristics



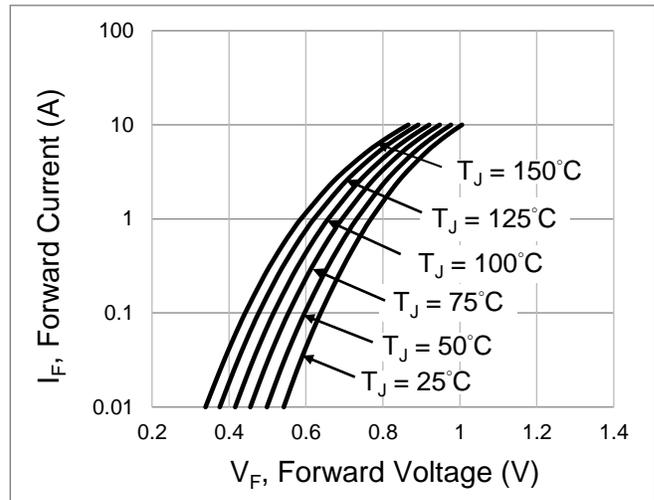


Fig.4 Typical Forward Characteristics

Product and Packing Information

Part No.	Package Type	Packing Type	Marking
ED502D	TO-252AA	3K pcs / 13" reel	ED502D

Packaging Information & Mounting Pad Layout

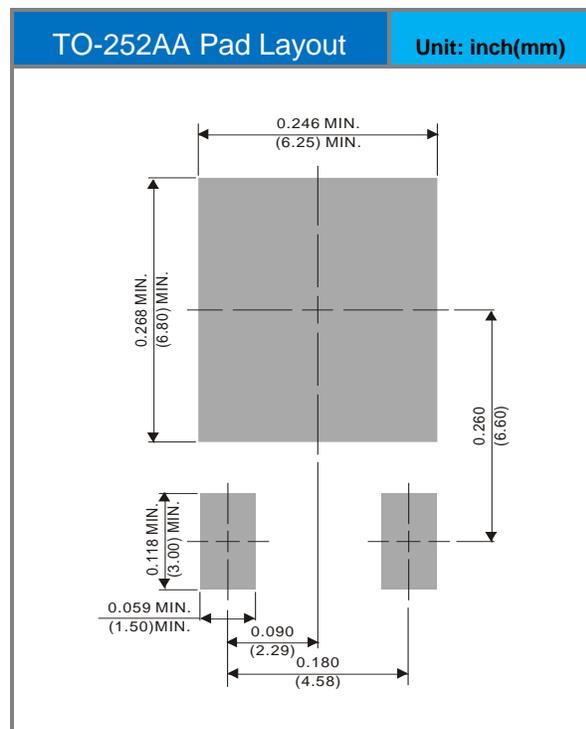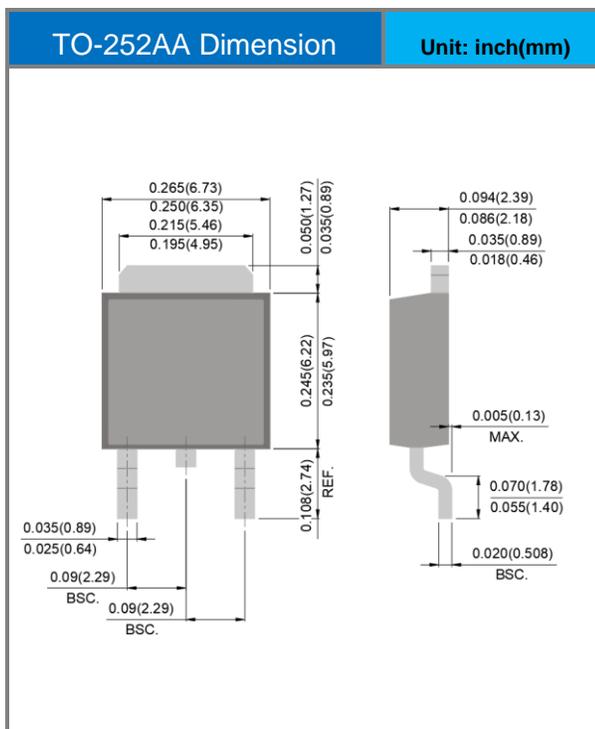

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.