

PE4305M1Q-AU ~ PE4336M1Q-AU Series

ESD Protection

Voltage

5~36 V



Features

- ISO10605(C=330pF, R=330Ω) :
-±30kV Air, ±30kV Contact for 5V ~ 24V
-±25kV Air, ±20kV Contact for 36V
- HBM $\geq \pm 8\text{KV}$ & CDM $\geq \pm 2\text{KV}$
- IEC61000-4-5(Lightning) : 3.3~17.5A(8/20uS)
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case : DFN1006-2L Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.0006 grams

DFN1006-2L



Maximum Ratings and Thermal Characteristics (T_A = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNIT
ESD IEC61000-4-2(Air)	V _{ESD}	±30	kV
ESD IEC61000-4-2(Contact)		±30	
Typical Thermal Resistance ^(Note 1)	R _{θJA}	430	°C/W
Operating Junction Temperature Range	T _J	-55~150	°C
Storage Temperature Range	T _{STG}	-55~150	°C

PE4305M1Q-AU ~ PE4336M1Q-AU Series

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PE4305M1Q-AU						
PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	5	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1\text{mA}$	6	-	8.5	V
Reverse Leakage Current	I_R	$V_R = 5\text{V}$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1\text{A}$, $t_P = 8/20\mu\text{s}$	-	-	8.5	V
		$I_{PP} = 17.5\text{A}$, $t_P = 8/20\mu\text{s}$	-	-	12.4	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1\text{MHz}$	-	-	200	pF

PE4307M1Q-AU						
PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	7	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1\text{mA}$	7.7	-	10	V
Reverse Leakage Current	I_R	$V_R = 7\text{V}$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1\text{A}$, $t_P = 8/20\mu\text{s}$	-	-	12	V
		$I_{PP} = 12.9\text{A}$, $t_P = 8/20\mu\text{s}$	-	-	16.8	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1\text{MHz}$	-	-	160	pF

PE4309M1Q-AU						
PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	9	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1\text{mA}$	9.9	-	12	V
Reverse Leakage Current	I_R	$V_R = 9\text{V}$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1\text{A}$, $t_P = 8/20\mu\text{s}$	-	-	13	V
		$I_{PP} = 9.5\text{A}$, $t_P = 8/20\mu\text{s}$	-	-	23	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1\text{MHz}$	-	-	120	pF

PE4305M1Q-AU ~ PE4336M1Q-AU Series

PE4312M1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	12	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1mA$	13.2	-	15.5	V
Reverse Leakage Current	I_R	$V_R = 12V$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	17	V
		$I_{PP} = 8.3A, t_P = 8/20\mu s$	-	-	26.5	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1MHz$	-	-	90	pF

PE4315M1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	15	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1mA$	16.5	-	20	V
Reverse Leakage Current	I_R	$V_R = 15V$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	22	V
		$I_{PP} = 7.8A, t_P = 8/20\mu s$	-	-	28	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1MHz$	-	-	65	pF

PE4318M1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	18	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1mA$	19.8	-	23.5	V
Reverse Leakage Current	I_R	$V_R = 18V$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	26.5	V
		$I_{PP} = 7A, t_P = 8/20\mu s$	-	-	32	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1MHz$	-	-	60	pF

PE4305M1Q-AU ~ PE4336M1Q-AU Series

PE4320M1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	20	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1mA$	22	-	26	V
Reverse Leakage Current	I_R	$V_R = 20V$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	29	V
		$I_{PP} = 5.8A, t_P = 8/20\mu s$	-	-	38	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1MHz$	-	-	55	pF

PE4322M1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	22	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1mA$	24.2	-	30	V
Reverse Leakage Current	I_R	$V_R = 22V$	-	-	0.05	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	34	V
		$I_{PP} = 5A, t_P = 8/20\mu s$	-	-	44	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1MHz$	-	-	45	pF

PE4324M1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	24	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1mA$	26.4	-	31	V
Reverse Leakage Current	I_R	$V_R = 24V$	-	-	0.05	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	35	V
		$I_{PP} = 4.8A, t_P = 8/20\mu s$	-	-	45	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1MHz$	-	-	42	pF

PE4305M1Q-AU ~ PE4336M1Q-AU Series

PE4336M1Q-AU						
PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	36	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1mA$	39.6	-	47	V
Reverse Leakage Current	I_R	$V_R = 36V$	-	-	0.05	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	51	V
		$I_{PP} = 3.3A, t_P = 8/20\mu s$	-	-	65	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1MHz$	-	-	20	pF

NOTES :

1. Mounted on a FR4 PCB, single-sided copper, standard footprint.
2. A transient suppressor is selected according to the working peak reverse voltage(V_{RWM}), which should be equal to or greater than the DC or continuous peak operation voltage level.

PE4305M1Q-AU ~ PE4336M1Q-AU Series

TYPICAL CHARACTERISTIC CURVES

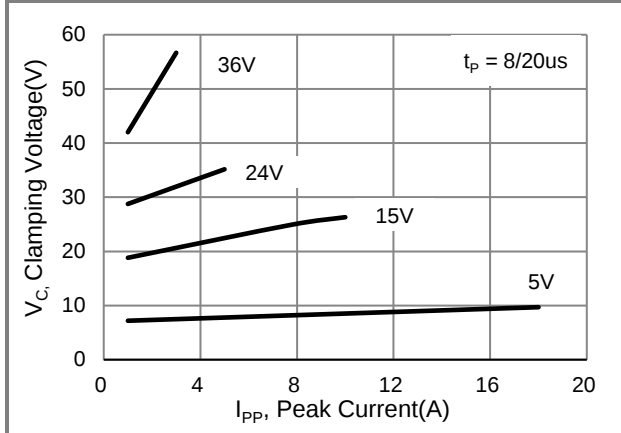


Fig.1 Typical Peak Clamping Voltage

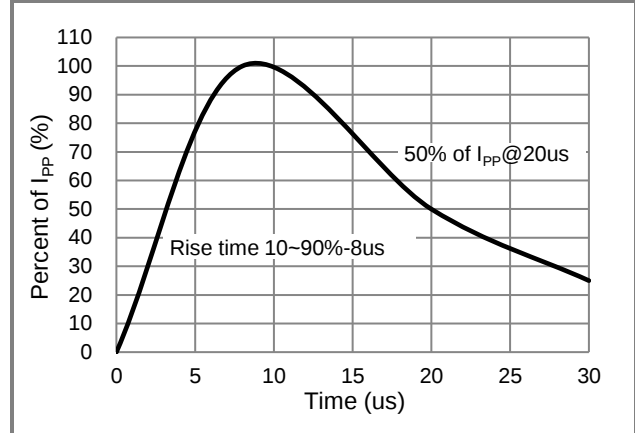


Fig.2 Pulse Waveform

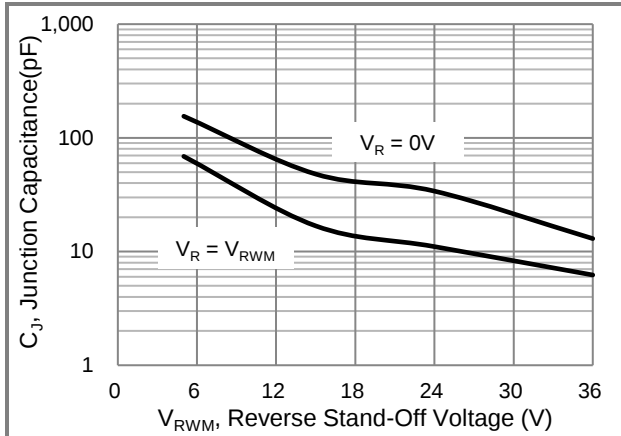


Fig.3 Typical Junction Capacitance

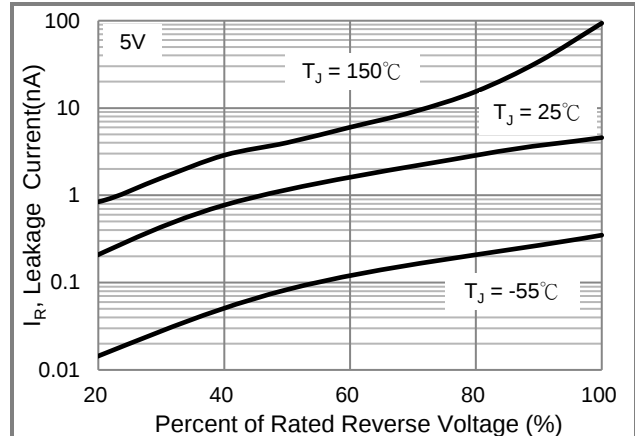


Fig.4 Typical Reverse Characteristics

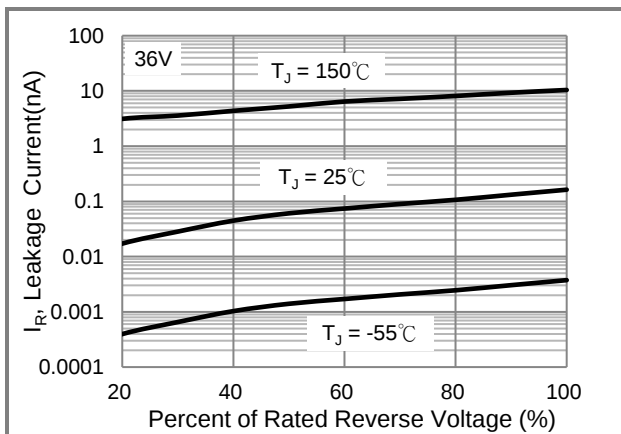


Fig.5 Typical Reverse Characteristics

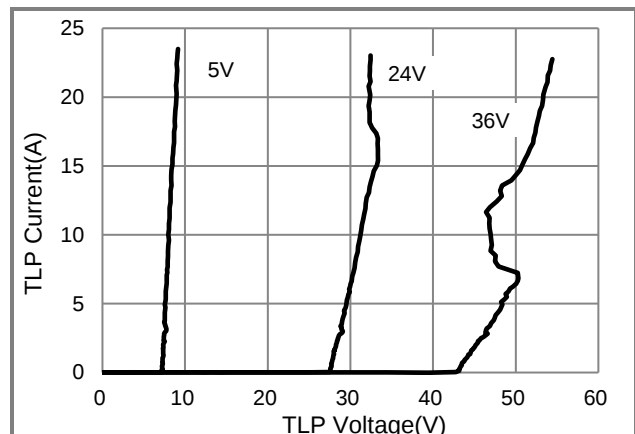




Fig.6 TLP Measurement

PE4305M1Q-AU ~ PE4336M1Q-AU Series

Product and Packing Information

Part No.	Package Type	Packing Type	Marking
PE4305M1Q-AU	DFN1006-2L	10K pcs / 7" reel	Y1
PE4307M1Q-AU	DFN1006-2L	10K pcs / 7" reel	Y2
PE4309M1Q-AU	DFN1006-2L	10K pcs / 7" reel	Y3
PE4312M1Q-AU	DFN1006-2L	10K pcs / 7" reel	Y4
PE4315M1Q-AU	DFN1006-2L	10K pcs / 7" reel	Y5
PE4318M1Q-AU	DFN1006-2L	10K pcs / 7" reel	Y6
PE4320M1Q-AU	DFN1006-2L	10K pcs / 7" reel	Y7
PE4322M1Q-AU	DFN1006-2L	10K pcs / 7" reel	Y8
PE4324M1Q-AU	DFN1006-2L	10K pcs / 7" reel	Y9
PE4336M1Q-AU	DFN1006-2L	10K pcs / 7" reel	YA

Packaging Information & Mounting Pad Layout

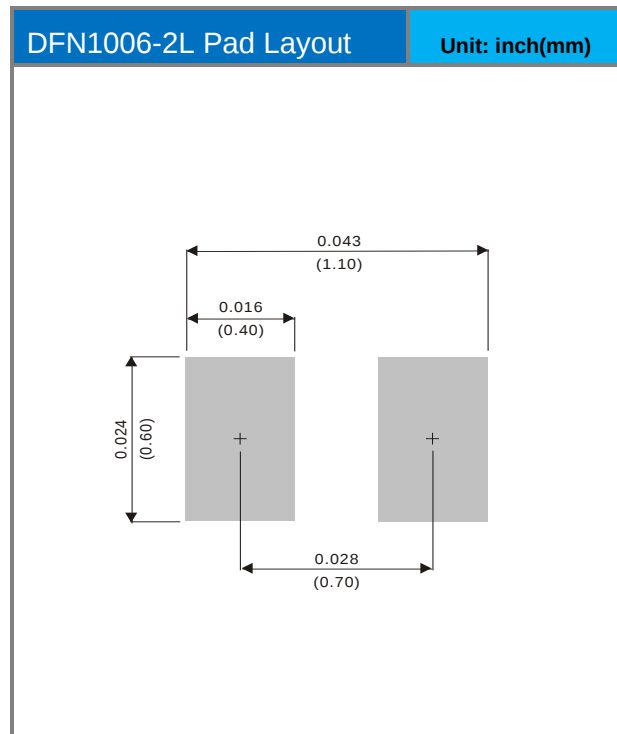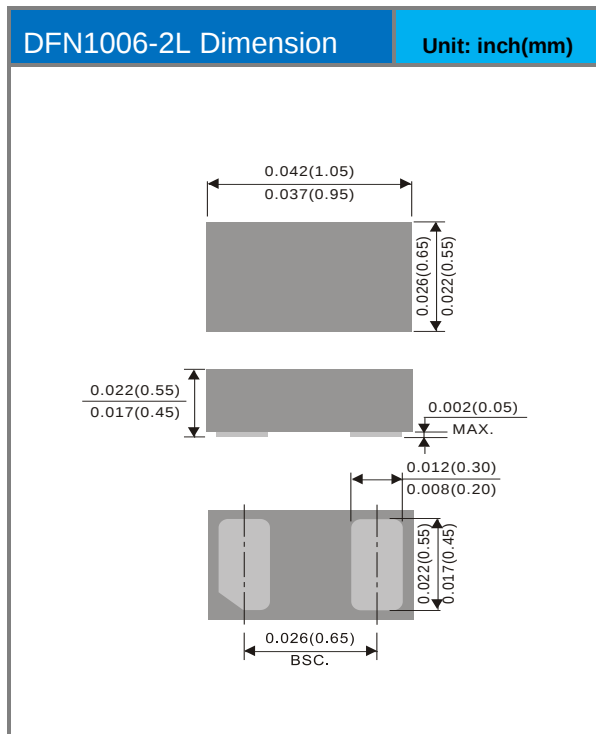

PE4305M1Q-AU ~ PE4336M1Q-AU Series

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from PANJIT International Inc..
- PANJIT International Inc. reserves the rights to make changes of the content herein the document follow PCN procedure. Please refer to our website for the latest document.
- PANJIT International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- PANJIT International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. PANJIT International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed or authorized for equipment relating to human life, life-saving or life-sustaining applications, such as medical instruments and aerospace machinery, or for other applications intended to cause personal injury. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify PANJIT International Inc. for any damages resulting from such improper use or sale. For additional terms and conditions regarding the use of PANJIT products, please refer to the Terms of Use available on the PANJIT website.
- Since PANJIT uses lot number as the tracking base, please provide the lot number for tracking when complaining.